



**DEPARTMENT OF THE NAVY**

OFFICE OF COUNSEL  
NAVAL UNDERSEA WARFARE CENTER DIVISION  
1176 HOWELL STREET NEWPORT RI 02841-1708

IN REPLY REFER TO

Attorney Docket No. 101455  
15 Apr 14

The below identified patent application is available for licensing. Requests for information should be addressed to:

TECHNOLOGY PARTNERSHIP ENTERPRISE OFFICE  
NAVAL UNDERSEA WARFARE CENTER  
1176 HOWELL ST.  
CODE 07TP, BLDG. 102T  
NEWPORT, RI 02841

Serial Number 13/566,418  
Filing Date 3 August 2012  
Inventor Curtis Z. Richard

Address any questions concerning this matter to the  
Office of Technology Transfer at (401) 832-1511.

DISTRIBUTION STATEMENT  
Approved for Public Release  
Distribution is unlimited

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>15 APR 2014</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2014 to 00-00-2014</b>	
4. TITLE AND SUBTITLE <b>System For Isolation Testing Of RF Transmitters And Receivers</b>			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Technology Partnership Enterprise Office,Naval Undersea Warfare Center, 1176 Howell St.,Code 07TP, Bldg. 102T,Newport,RI,02841</b>			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>12</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

**SYSTEM FOR ISOLATION TESTING OF RF TRANSMITTERS AND RECEIVERS**

**STATEMENT OF GOVERNMENT INTEREST**

**[0001]** The invention described herein may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefore.

**CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

**[0002]** None.

**BACKGROUND OF THE INVENTION**

**(1) Field of the Invention**

**[0003]** The present invention relates generally to the testing of transmitters and receivers, and more particularly to a system that can perform isolation testing of a radio frequency (RF) transmitter or an RF receiver.

**(2) Description of the Prior Art**

**[0004]** Currently, the testing and diagnosing of a faulty radio frequency (RF) transmission and receiving systems requires that the system be taken out of the field to a lab/testing location. This is a time-consuming process. Further, if a problem exists in a network of RF transmission/receiving systems, repair technicians are forced to guess at which system

should be pulled out of the network for testing.

#### **SUMMARY OF THE INVENTION**

**[0005]** Accordingly, it is an object of the present invention to provide a system for testing an RF transmission and receiving system.

**[0006]** Another object of the present invention is to provide a system that can be used for field testing of an RF transmission and receiving system.

**[0007]** Still another embodiment of the present invention is to provide a system that can be used to field test the transmission portion or receiving portion of an RF transmission and receiving system.

**[0008]** Other objects and advantages of the present invention will become more obvious hereinafter in the specification and drawings.

**[0009]** In accordance with the present invention, a system for performing isolation testing of radio frequency (RF) transmission and receiving systems includes a programmable device that generates a test signal indicative of a RF signal and receives a processed test signal indicative of the test signal after processing thereof by one of a RF transmission system and a RF receiving system. The programmable device performs a comparison between the processed test signal and

calibration data, and generates a report based on the comparison. A hardwire signal router provides the test signal to one of the RF transmission system and the RF receiving system, and provides the processed test signal to the programmable device. The router includes a first switching mechanism and a second switching mechanism operating in a coordinated fashion to define one of a first state and a second state. The first state is defined when (i) the first switching mechanism directs the test signal to an input of the RF transmission system wherein the RF transmission system generates the processed test signal, and (ii) the second switching mechanism directs the processed test signal so-generated by the RF transmission system to the programmable device. The second state is defined when (i) the second switching mechanism directs the test signal to an input of the RF receiving system wherein the RF receiving system generates the processed test signal, and (ii) the first switching mechanism directs the processed test signal so-generated by the RF receiving system to the programmable device.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0010]** Other objects, features and advantages of the present invention will become apparent upon reference to the following description of the preferred embodiments and to the drawings,

wherein corresponding reference characters indicate corresponding parts throughout the several views of the drawings and wherein:

**[0011]** FIG. 1 is a top-level block diagram of an RF transmission and receiving system in accordance with the prior art; and

**[0012]** FIG. 2 is a schematic diagram of a system for performing isolation testing of the transmission portion or receiving portion of an RF transmission and receiving system in accordance with the present invention.

#### **DETAILED DESCRIPTION OF THE INVENTION**

**[0013]** Referring now to the drawings and more particularly to FIG. 1, a block diagram of a prior art RF transmission and receiving system is shown and is referenced generally by numeral 10. A transmission signal source 12 provides transmission data to a transmission system 14 that formats the transmission data for transmission as an RF signal 18 by an antenna 16. On the receiving side of system 10, an antenna 26 receives an RF signal 28 and couples same to a receiving system 24 that formats RF signal 28 for presentation to a user by a received signal presentation module 22 (e.g., display, audio reproduction and/or hard copy presentation, etc.).

**[0014]** Referring now to FIG. 2, the above-described RF transmission and receiving system 10 is illustrated with the

present invention's system for performing isolation testing of either transmission system 14 or receiving system 24. Briefly, the present invention includes a programmable device 30 hard wired to system 10 where such hardwiring includes switching mechanisms 32 and 34 operable to issue test signals to (and received processed test signals from) one of transmission 14 and receiving system 24.

**[0015]** Programmable device 30 includes a processor 30A, memory 30B, a port 30C for injecting signals indicative of either RF transmission data (for transmission system 14) or an RF signal (for receiving system 24), and a port 30D for receiving signals indicative of either formatted transmission data (from transmission system 14) or presentation of formatted received data (from receiving system 24). In general, processor 30A sweeps one or more user selected waveforms through a selected frequency range based on application requirements. The testing sequence can be pre-programmed into memory 30B.

**[0016]** Switching mechanisms 32 and 34 are set to isolate signal routing through either transmission system 14 or receiving system 25. More specifically, switches 32A, 32B and 34A are operated to couple transmission system 14 to ports 30C and 30D when performing isolated testing of transmission system 14. In a similar fashion, switches 32B, 34B and 32C are operated to couple receiving system 24 to ports 30C and 30D when

performing isolated testing of receiving system 24.

**[0017]** In either of the above-described testing scenarios/states, the signals/data received at port 30D can be compared (by processor 30A) to calibration data stored in memory 30B. The results of the comparisons can be in the form of a report (e.g., simple "pass-fail" report, graphical data reports, etc.) that can be displayed in real-time via a display 36 and/or stored in memory 30B.

**[0018]** Programmable device 30 can be based on a software defined radio (SDR) configured to operate as described herein. By way of example, one such software defined radio is the open source GNU radio platform utilizing the Universal Software Radio Peripheral.

**[0019]** The advantages of the present invention are numerous. Isolation testing of RF transmission and receiving systems can be performed in the field with a low-cost device. Tests can be pre-programmed such that a technician can readily determine if a transmission or receiving system is faulty. The invention will be particularly useful when trouble shooting RF transmission and receiving systems in the field.


**[0020]** It will be understood that many additional changes in the details, materials, steps and arrangement of parts, which have been herein described and illustrated in order to explain the nature of the invention, may be made by those skilled in the art

within the principle and scope of the invention as expressed in the appended claims.

**SYSTEM FOR ISOLATION TESTING OF RF TRANSMITTERS AND RECEIVERS**

**ABSTRACT OF THE DISCLOSURE**

A programmable device generates a test signal indicative of a RF signal and receives a processed test signal indicative of the test signal after processing thereof by one of a RF transmission system and a RF receiving system. The programmable device performs a comparison between the processed test signal and calibration data, and generates a report based on the comparison. A hardwire signal router provides the test signal to one of the RF transmission system and the RF receiving system, and provides the processed test signal to the programmable device. The router includes a first switching mechanism and a second switching mechanism operating in a coordinated fashion to define one of a first state for testing the RF transmission system and a second state for testing the RF receiving system.

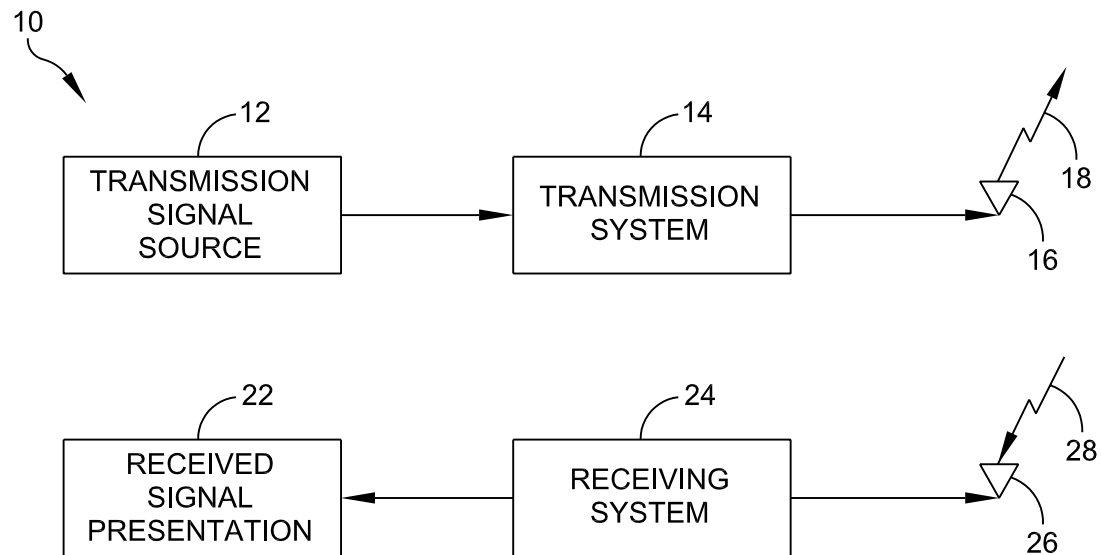

**FIG. 1**  
(PRIOR ART)

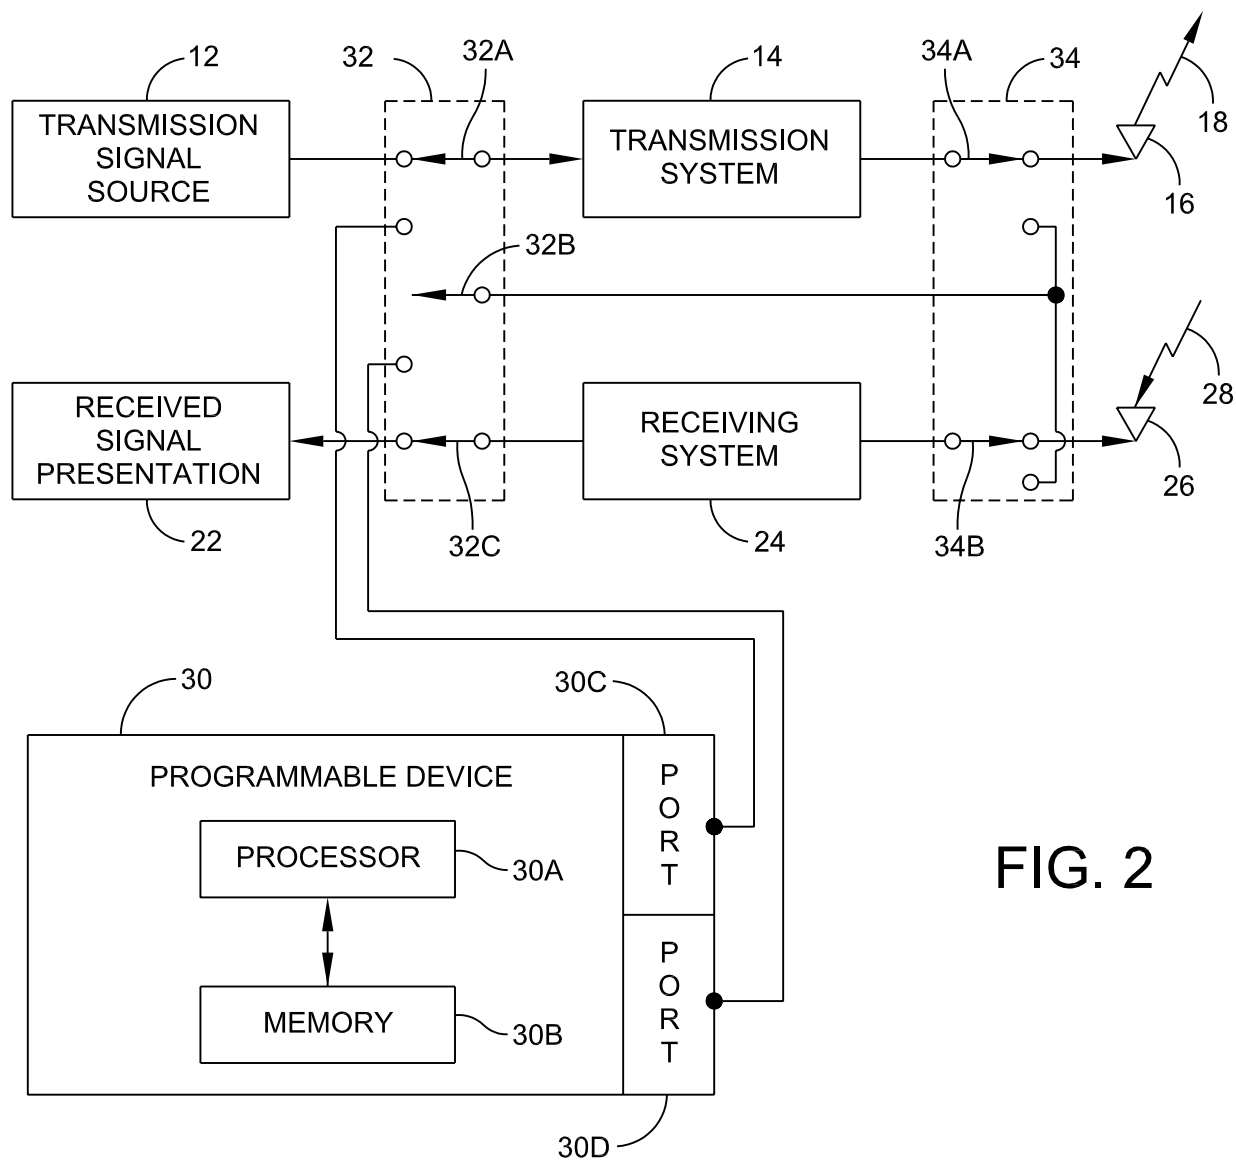


FIG. 2